# GV57MG V2(Plus) @Track Air Interface Firmware Update

## EGPRS/LTE Cat-M1/LTE Cat-NB2/GNSS Tracker

TRACGV57MG V2FTAN001

V1.01



Driving Smarter IoT

www.queclink.com

| | |
|---|---|
| **Document Title** | GV57MG V2(Plus) @Track Air Interface Firmware Update |
| **Version** | 1.01 |
| **Date** | April 3, 2024 |
| **Status** | Release |
| **Document Control ID** | TRACGV57MG V2FTAN001 |

**General Notes**

Queclink offers this information as a service to its customers, to support application and engineering efforts that use the products designed by Queclink. The information provided is based upon requirements specifically provided to Queclink by the customers. Queclink has not undertaken any independent search for additional relevant information, including any information that may be in the customer's possession. Furthermore, system validation of this product designed by Queclink within a larger electronic system remains the responsibility of the customer or the customer's system integrator. All specifications supplied herein are subject to change.

**Copyright**

This document contains proprietary technical information which is the property of Queclink Wireless Solutions Co., Ltd. The copying of this document, distribution to others, and communication of the content thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of a patent grant or registration of a utility model or design. All specifications supplied herein are subject to change without notice at any time.

Queclink Confidential

# Contents

History ..... 3
1. Scope ..... 4
2. Message ..... 5
2.1. Command and Acknowledgement ..... 5
2.1.1. Start the Firmware Update ..... 5
2.1.2. Stop the Firmware Update ..... 6
2.1.3. Acknowledgement ..... 7
2.2. Report ..... 8
2.2.1. Firmware Update Report in ASCII Format ..... 8
2.2.1.1. Update Confirmation ..... 8
2.2.1.2. Package Download ..... 9
2.2.1.3. Firmware Update ..... 9
2.2.2. Extended Firmware Update Report in ASCII Format ..... 10
2.2.2.1. Update Confirmation ..... 10
2.2.2.2. Package Download ..... 11
2.2.2.3. Firmware Update ..... 12
3. Firmware Update Process ..... 14
3.1. Initiation of the Update Process ..... 14
3.2. Confirmation of the Update Process ..... 14
3.3. Download of the Update Package ..... 14
3.4. Update of the Firmware ..... 15
3.5. An Example of Successful Update ..... 16

Queclink Confidential

# History

| Version | Date | Author | Description of Change |
|---|---|---|---|
| 1.00 | March 30, 2023 | Mint Fang | Initial. |
| 1.01 | April 3, 2024 | Jane Wang | Modify GV57MG V2 to GV57MG V2(Plus). |

Queclink Confidential

# 1. Scope

This document describes the FOTA (firmware over the air) update for the GV57MG V2(Plus), which enables end users to update the firmware of the GV57MG V2(Plus) remotely without having to bring the devices to the service centre. Thus the service provider of the GV57MG V2(Plus) can conveniently promote new features or bug fixes to end users and improve customer experience.

During the firmware update, the following are involved:

- ✧ the terminal: the GV57MG V2(Plus) whose firmware is to be updated
- ✧ the backend server: the server which remotely controls the terminal and receives report from the terminal
- ✧ the file server: the server which hosts the packages of the update

The file server and the backend server can be hosted on the same machine.

The document describes the process of the firmware update and the necessary message exchange during the update, while the following information isn't covered:

- ✧ The timing and the strategy that the backend server initiates the update
- ✧ The deployment method of the update package
- ✧ How to set up a file server
- ✧ The communication between the backend server and the file server

Queclink Confidential

# 2. Message

## 2.1. Command and Acknowledgement

The command **AT+GTUPD** is used to start and stop the firmware update remotely.

### 2.1.1. Start the Firmware Update

To start the firmware update, the backend server sends **AT+GTUPD (Sub-Command: 0)** command to the device. Upon receiving this command, the device is informed of where and how to download the package.

➢ **Start: AT+GTUPD=**

| **Example:**<br>**AT+GTUPD=gv57,0,0,30,0,,,http://180.169.235.202:9017/GV57MG V2/BB/GV57MG V2R00A01V15M512_fota.bin,,0,0,,0001$**<br>**AT+GTUPD=gv57,0,0,30,0,,,http://180.169.235.202:9017/GV57MG V2 /MODEM/QM100_V17K29_V20K30_modem.bin,,7,0,,0001$** | | | |
|---|---|---|---|
| **Parameter** | **Length (byte)** | **Range/Format** | **Default** |
| Password | 4 – 20 | ‘0’-‘9’, ‘a’-‘z’, ‘A’-‘Z’ | gv57 |
| Sub-Command | 1 | 0 | |
| Max Download Retry | 1 | 0 – 3 | 0 |
| Download Timeout | 2 | 10 – 30 min | 20 |
| Download Protocol | 1 | 0 | 0 |
| Download User Name | <=6 | ‘0’-‘9’, ‘a’-‘z’, ‘A’-‘Z’ | |
| Download Password | <=6 | ‘0’-‘9’, ‘a’-‘z’, ‘A’-‘Z’ | |
| Download URL | <=100 | legal URL | |
| Reserved | 0 | | |
| Update Type | 1 | 0\|1\|7 | 0 |
| Extended Status Report | 1 | 0\|1 | 0 |
| Identifier Number | <=8 | 00000000-FFFFFFFF | |
| Serial Number | 4 | 0000-FFFF | |
| Tail Character | 1 | $ | $ |

✧ <*Password*>: The valid characters for the password include ‘0’-9’, ‘a’-‘z’, and ‘A’-‘Z’. The default value is “gv57”.

✧ <*Sub-Command*>: The sub-command of **AT+GTUPD**. 0 means “Start the firmware update”.

✧ <*Max Download Retry*>: The parameter which specifies the maximum number of

retries to download the update package upon download failure.

- ✧ <*Download Timeout*>: The parameter which specifies the expiration timeout of one download. If the download expires, it is considered to be a failure.
- ✧ <*Download Protocol*>: The protocol used to download the package. Only HTTP is supported now. Set it to 0.
- ✧ <*Download User Name*>: If the file server uses authentication, the user name is specified here.
- ✧ <*Download Password*>: If the file server uses authentication, the password is specified here.
- ✧ <*Download URL*>: The parameter which specifies the URL to download the package.
- ✧ <*Reserved*>: Reserved for future use.
- ✧ <*Update Type*>: The parameter which specifies the type of the firmware to be updated.
  - 0: BB firmware
  - 1: MCU firmware
  - 7: Modem firmware
- ✧ <*Extended Status Report*>: The parameter that indicates the message to be reported for the configuration update status. In HEX format, this parameter will be ignored and only the **+RESP:GTUPD** message will be sent to the backend server.
  - 0: Report the **+RESP:GTUPD** message to indicate the firmware update status.
  - 1: Report the **+RESP:GTEUD** message to indicate the firmware update status.
- ✧ <*Identifier Number*>: The parameter which identifies the firmware update request. It will be included in the **+RESP:GTEUD** message to indicate the request it is related to.
- ✧ <*Serial Number*>: The exact serial number will be sent back to the platform in ACK. It is in hexadecimal format. It begins from 0000 and increases by 1 every time. It should roll back after "FFFF".
- ✧ <*Tail Character*>: The parameter which indicates the end of the command. It must be '$'.

**Note:** All buffered messages will be deleted before BB, MCU and Modem firmware downloading.

### 2.1.2. Stop the Firmware Update

Before the device finishes downloading the update package, the backend server can use the **AT+GTUPD (Sub-Command: 1)** command to cancel the current firmware update. If the package is downloaded successfully, this command will be ignored.

➢ **Stop: AT+GTUPD=**

| **Example:**<br>**AT+GTUPD=gv57,1,,,,,0001$** | | | |
|---|---|---|---|
| **Parameter** | **Length (byte)** | **Range/Format** | **Default** |
| Password | 4 – 20 | '0'-'9', 'a'-'z', 'A'-'Z' | gv57 |
| Sub-command | 1 | 1 | |

| | | | |
|---|---|---|---|
| Reserved | 0 | | |
| Reserved | 0 | | |
| Reserved | 0 | | |
| Reserved | 0 | | |
| Serial Number | 4 | 0000-FFFF | |
| Tail Character | 1 | $ | $ |

✧ <*Sub-Command*>: The sub-command of AT+GTUPD. 1 means “Cancel the current firmware update process”.

### 2.1.3. Acknowledgement

The acknowledgement message of the **AT+GTUPD** command:

➢ **+ACK:GTUPD,**

| **Example: +ACK:GTUPD,840400,865284040755112,GV57MGV2,0001,20230501143612,5A52$** | | | |
|---|---|---|---|
| **Parameter** | **Length (byte)** | **Range/Format** | **Default** |
| Protocol Version | 6 | (HEX) | |
| Unique ID | 15 | (IMEI) | |
| Device Name | <=20 | '0' - '9', 'a' - 'z', 'A' - 'Z', '-', '_' | |
| Serial Number | 4 | (HEX) | |
| Send Time | 14 | YYYYMMDDHHMMSS | |
| Count Number | 4 | (HEX) | |
| Tail Character | 1 | $ | $ |

✧ <*Protocol Version*>: The protocol version that the device conforms to. The first two characters XX indicate the device type. **84** means GV57MG V2 and **89** means GV57MG Plus. The middle two characters represent the major version number and the last two characters represent the minor version number. Both the major version and the minor version are hex digits. For example, **020A** means version 2.10.
✧ <*Unique ID*>: The device’s IMEI.
✧ <*Device Name*>: An ASCII string for the name of the device.
✧ <*Serial Number*>: The <*Serial Number*> in the **AT+GTUPD** command.
✧ <*Send Time*>: The local time when receiving the right **AT+GTUPD** command.
✧ <*Count Number*>: The self-increasing count number will be included in every acknowledgment message. The count begins from 0000 and increases by 1 every time. It will roll back after “FFFF”.

Queclink Confidential

## 2.2. Report

During the firmware update process, the device reports its status to the backend server via the message **+RESP:GTUPD** upon entering different phases, including update confirmation information, package download information and firmware update information.

### 2.2.1. Firmware Update Report in ASCII Format

#### 2.2.1.1. Update Confirmation

The device sends the update confirmation information to the backend server if:

- ✧ the update command is confirmed by the device
- ✧ the update command is refused by the device
- ✧ the update process is canceled by the backend server or refused because of an incorrect URL
- ✧ the update command is refused because of low battery

➢ **Confirmation: +RESP:GTUPD,**

| **Example: +RESP:GTUPD,840400,865284040755112,GV57MGV2,100,,20230501143612,5A53$** | | | |
|---|---|---|---|
| **Parameter** | **Length (byte)** | **Range/Format** | **Default** |
| Protocol Version | 6 | (HEX) | |
| Unique ID | 15 | (IMEI) | |
| Device Name | <=20 | '0' - '9', 'a' - 'z', 'A' - 'Z', '-', '_' | |
| Code | 3 | 100 - 103\|110 - 114\|170 - 173 | |
| Reserved | 0 | | |
| Send Time | 14 | YYYYMMDDHHMMSS | |
| Count Number | 4 | (HEX) | |
| Tail Character | 1 | $ | $ |

- ✧ <*Code*>: The parameter which indicates the confirmation information.
  - 100/110/170: The update command is confirmed by the device.
  - 101/111/171: The update command is refused by the device.
  - 102/112/172: The update process is cancelled by the backend server or refused because of an incorrect URL.
  - 103/113/173: The update process is refused because of low battery.
  - 114: The update command is refused by the device because MCU firmware does not support the update.

**Note:** If the value of <*Update Type*> in the **AT+GTUPD** command is 1, the value of <*Code*> will be 110/111/112/113/114. If the value of <*Update Type*> in the **AT+GTUPD** command is 7, the value of <*Code*> will be 170/171/172/173.

#### 2.2.1.2. Package Download

The device sends the package download information to the backend server if:

- ✧ the device starts to download the package
- ✧ the device finishes downloading the package successfully
- ✧ the device fails to download the package

➢ **Download: +RESP:GTUPD,**

| **Example: +RESP:GTUPD,840400,865284040755112,GV57MGV2,200,1,20230501143612,5A51$** | | | |
|---|---|---|---|
| **Parameter** | **Length (byte)** | **Range/Format** | **Default** |
| Protocol Version | 6 | (HEX) | |
| Unique ID | 15 | (IMEI) | |
| Device Name | <=20 | '0' - '9', 'a' - 'z', 'A' - 'Z', '-', '_' | |
| Code | 3 | 200 - 203\|210 - 212\|270 - 272 | |
| Download Times | 1 | 1 – 4 | |
| Send Time | 14 | YYYYMMDDHHMMSS | |
| Count Number | 4 | (HEX) | |
| Tail Character | 1 | $ | $ |

- ✧ <*Code*>: The parameter which indicates the download information.
  - 200/210/270: The device starts to download the package.
  - 201/211/271: The device finishes downloading the package successfully.
  - 202/212/272: The device fails to download the package.
  - 203/213/273: The update process is refused because of an incorrect firmware version.
- ✧ <*Download Times*>: The count number of the package downloads.

**Note:** If the value of <*Update Type*> in the **AT+GTUPD** command is 1, the value of <*Code*> will be 210/211/212. If the value of <*Update Type*> in the **AT+GTUPD** command is 7, the value of <*Code*> will be 270/271/272.

#### 2.2.1.3. Firmware Update

The device sends the firmware update information to the backend server if:

- ✧ the device starts to update the firmware
- ✧ the device finishes updating the firmware successfully
- ✧ the device fails to update the firmware
- ✧ the update process does not start because of low battery

➢ **Update: +RESP:GTUPD,**

| **Example:** |
|---|

| +RESP:GTUPD,840400,865284040755112,GV57MGV2,300,,20230501143612,5A54$ | | | |
|---|---|---|---|
| **Parameter** | **Length (byte)** | **Range/Format** | **Default** |
| Protocol Version | 6 | (HEX) | |
| Unique ID | 15 | (IMEI) | |
| Device Name | <=20 | '0' - '9', 'a' - 'z', 'A' - 'Z', '-', '_' | |
| Code | 3 | 300 - 303\|310 - 313\|370 - 373 | |
| Reserved | 0 | | |
| Send Time | 14 | YYYYMMDDHHMMSS | |
| Count Number | 4 | (HEX) | |
| Tail Character | 1 | $ | $ |

✧ <*Code*>: The parameter which indicates the update information.
- 300/310/370: The device starts to update the firmware.
- 301/311/371: The device finishes updating the firmware successfully.
- 302/312/372: The device fails to update the firmware.
- 303/313/373: The update process does not start because of low battery.

**Note:** If the value of <*Update Type*> in the **AT+GTUPD** command is 1, the value of <*Code*> will be 310/311/312/313. If the value of <*Update Type*> in the **AT+GTUPD** command is 7, the value of <*Code*> will be 370/371/372/373.

### 2.2.2. Extended Firmware Update Report in ASCII Format

#### 2.2.2.1. Update Confirmation

The device will send the update confirmation information to the backend server if:
✧ the update command is confirmed by the device
✧ the update command is refused by the device
✧ the update process is cancelled by the backend server or refused because of an incorrect URL
✧ the update command is refused because of low battery

➢ **+RESP:GTEUD,**

| Example: +RESP:GTUPD,840400,865284040755112,GV57MGV2,100,,2,,,,,20230501143612,5A54$ | | | |
|---|---|---|---|
| **Parameter** | **Length (byte)** | **Range/Format** | **Default** |
| Protocol Version | 6 | (HEX) | |
| Unique ID | 15 | (IMEI) | |
| Device Name | <=20 | '0' - '9', 'a' - 'z', 'A' - 'Z', '-', '_' | |
| Code | 3 | 100 - 103\|110 - 113\|170 - 173 | |
| Reserved | 0 | | |

| | | | |
|---|---|---|---|
| Identifier Number | 8 | (HEX) | |
| Reserved | 0 | | |
| Reserved | 0 | | |
| Reserved | 0 | | |
| Reserved | 0 | | |
| Send Time | 14 | YYYYMMDDHHMMSS | |
| Count Number | 4 | (HEX) | |
| Tail Character | 1 | $ | $ |

✧ <*Code*>: The parameter which indicates the confirmation information.

- 100/110/170: The update command is confirmed by the device.
- 101/111/171: The update command is refused by the device.
- 102/112172: The update process is cancelled by the backend server or refused because of an incorrect URL.
- 103/113/173: The update process is refused because of low battery.

**Note:** If the value of <*Update Type*> in the **AT+GTUPD** command is 1, the value of <*Code*> will be 110/111/112/113. If the value of <*Update Type*> in the **AT+GTUPD** command is 7, the value of <*Code*> will be 170/171/172/173.

#### 2.2.2.2. Package Download

The device will send the package download information to the backend server if:

✧ the device starts to download the package
✧ the device finishes downloading the package successfully
✧ the device fails to download the package

➢ **+RESP:GTEUD,**

| **Example: +RESP:GTUPD,840400,865284040755112,GV57MGV2,200,1,00000002,,,,,20230501143612,5A54$** | | | |
|---|---|---|---|
| **Parameter** | **Length (byte)** | **Range/Format** | **Default** |
| Protocol Version | 6 | (HEX) | |
| Unique ID | 15 | (IMEI) | |
| Device Name | <=20 | '0' - '9', 'a' - 'z', 'A' - 'Z', '-', '_' | |
| Code | 3 | 200 - 203\|210 - 212\|270 - 272 | |
| Download Times | 1 | 1 - 4 | |
| Identifier Number | 8 | (HEX) | |
| Reserved | 0 | | |
| Reserved | 0 | | |
| Reserved | 0 | | |
| Reserved | 0 | | |

| | | | |
|---|---|---|---|
| Send Time | 14 | YYYYMMDDHHMMSS | |
| Count Number | 4 | (HEX) | |
| Tail Character | 1 | $ | $ |

✧ <*Code*>: The parameter which indicates the download information.
- 200/210/270: The device starts to download the package.
- 201/211/271: The device finishes downloading the package successfully.
- 202/212/272: The device fails to download the package.
- 203: The update process is refused because of an incorrect firmware version.

✧ <*Download Times*>: The count number of the package downloads.

**Note:** If the value of <*Update Type*> in the **AT+GTUPD** command is 1, the value of <*Code*> will be 210/211/212. If the value of <*Update Type*> in the **AT+GTUPD** command is 7, the value of <*Code*> will be 270/271/272.

#### 2.2.2.3. Firmware Update

The device will send the firmware update information to the backend server if:

✧ the device starts to update firmware
✧ the device finishes updating the firmware successfully
✧ the device fails to update the firmware
✧ the update process does not start because of low battery

➢ **+RESP:GTEUD,**

| **Example: +RESP:GTUPD,840400,865284040755112,GV57MGV2,300,,00000002,,,,,20230501143612,5A54$** | | | |
|---|---|---|---|
| **Parameter** | **Length (byte)** | **Range/Format** | **Default** |
| Protocol Version | 6 | (HEX) | |
| Unique ID | 15 | (IMEI) | |
| Device Name | <=20 | '0' - '9', 'a' - 'z', 'A' - 'Z', '-', '_' | |
| Code | 3 | 300 - 303\|310 - 313\|370 - 373 | |
| Reserved | 0 | | |
| Identifier Number | 8 | (HEX) | |
| Reserved | 0 | | |
| Reserved | 0 | | |
| Reserved | 0 | | |
| Reserved | 0 | | |
| Send time | 14 | YYYYMMDDHHMMSS | |
| Count Number | 4 | (HEX) | |
| Tail Character | 1 | $ | $ |

Queclink Confidential

✧ <*Code*>: The parameter which indicates the updated information.

- 300/310/370: The device starts to update the firmware.
- 301/311/371: The device finishes updating the firmware successfully.
- 302/312/372: The device fails to update the firmware.
- 303/313/373: The update process does not start because of the low battery.

**Note:** If the value of <*Update Type*> in the **AT+GTUPD** command is 1, the value of <*Code*> will be 310/311/312/313. If the value of <*Update Type*> in the **AT+GTUPD** command is 7, the value of <*Code*> will be 370/371/372/373.

Queclink Confidential

# 3. Firmware Update Process

The firmware update process includes four steps.

## 3.1. Initiation of the Update Process

The backend server sends the **AT+GTUPD (Sub-Command: 0)** command to the device to initiate the update process. Along with this command, the backend server sends necessary information to the device to start the update process.

It is the backend server's duty to decide when and how to initiate the firmware update process to all the devices it controls. As the response messages collector and controller, the backend server has all the information it needs to start an update process including the current firmware versions of the devices it controls (retrieved with the **AT+GTRTO** command), the version of the latest available firmware and the location of the proper update packages.

## 3.2. Confirmation of the Update Process

Upon receiving the **AT+GTUPD (Sub-Command: 0)** command, the device will first check the current battery capacity. If the battery capacity can't support the update process, it will report the **+RESP:GTUPD (Code: 103)** message to notify the backend server that the update process is to be aborted because of low battery. If the battery capacity is ample, the device will send the **+RESP:GTUPD** message with confirmation information to the backend server. Then the update process proceeds to the next step.

If the update command is confirmed, the device will turn into a non-interactive mode, during which the end user can't make phone calls, and all incoming calls are rejected automatically until the update process finishes. At the meantime, the device will ignore all the commands that are received from the backend server but not related to the update process. Also the device will stop sending all the reports that are not related to the update process.

## 3.3. Download of the Update Package

If the update command is confirmed, the device will use the information sent by the backend server to download the update package. If the device fails to download the update package, it will retry the "Max Download Retry" times that is configured in the upgrade command. If all attempts fail, the update process will be aborted and the device will automatically reboot to go back to the normal working mode. If the download succeeds, the update process will proceed to the next step. Either way, the device will

send the **+RESP:GTUPD** message with download information to the backend server.


Before the package is downloaded, the backend server can send the **AT+GTUPD (Sub-Command: 1)** command to cancel the current update process. This is the only chance to abort during the update process.

### 3.4. Update of the Firmware

After downloading the package successfully, the device will check the battery capacity again. If the battery can't support the update process, the device will report the **+RESP:GTUPD (Code: 303)** message to notify the backend server that the update process is to be aborted because of low battery. If the battery capacity is ample, the device will send the **+RESP:GTUPD (Code: 300)** message to the backend server to indicate the start of the update. Then it will use the update package to update the firmware. After the update, whether it succeeds or fails, the device will reboot automatically. After the device boots up, it sends the **+RESP:GTUPD** message with update information to the backend server and works as usual.

Queclink Confidential

### 3.5. An Example of Successful Update

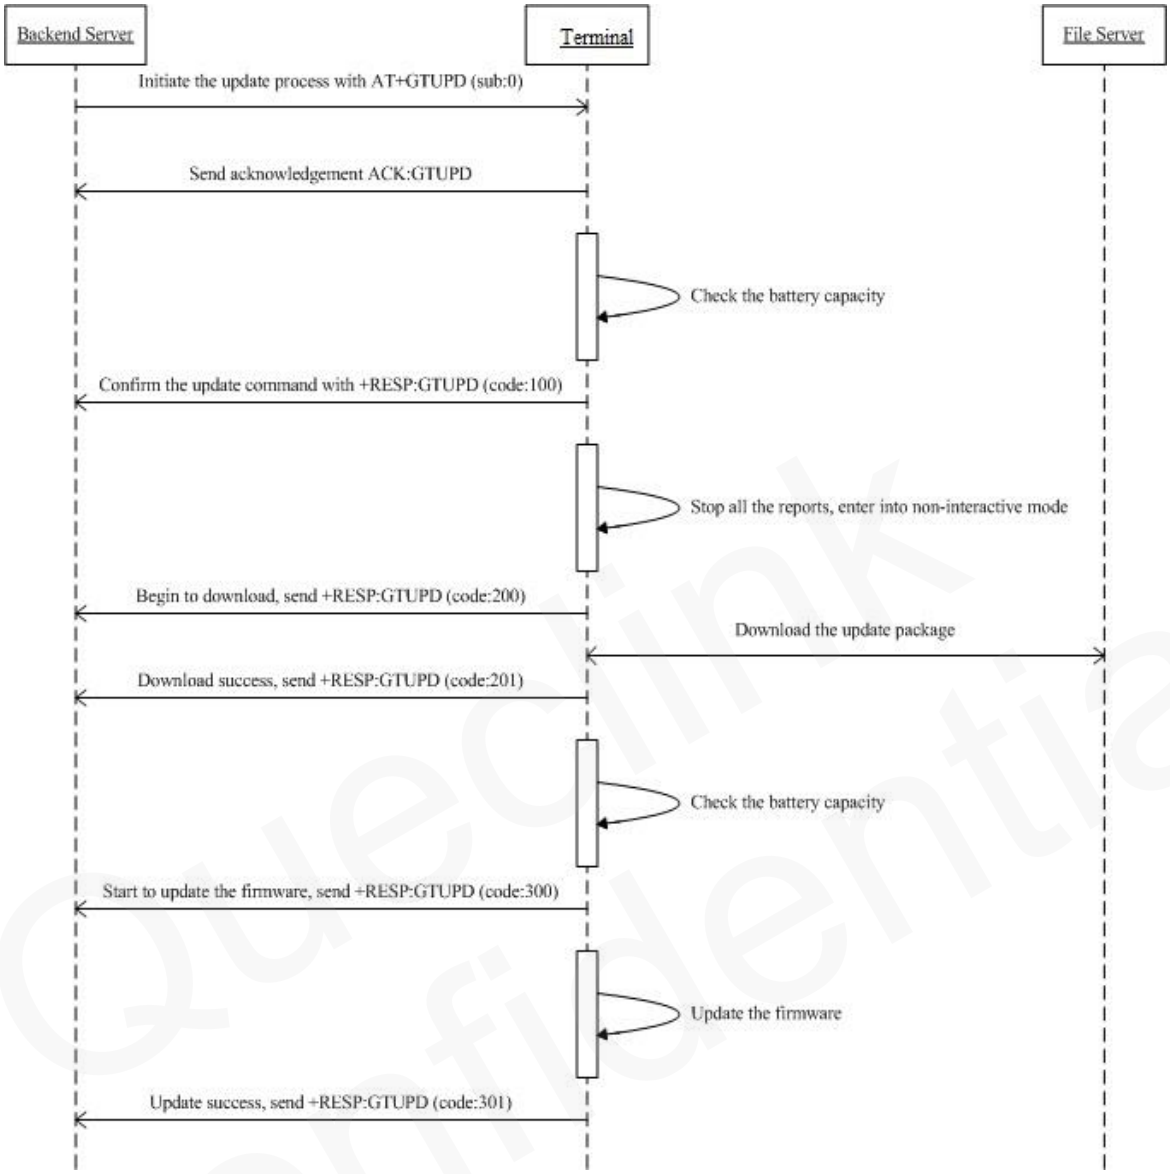


Queclink Confidential